



## 2006 & 2007 C6 Corvette Supplement Install Guide

Use this guide in addition to the blip module install manual.

**Be sure ignition power is OFF during installation**



Prepare for installing the blip module near or in the glove box:

Pin#	Color	Signal
1	BLK	GND System
11	ORG	+12V Switched PWR
3	BRN	Brake 0 to 12V
4	YEL	Clutch 12V to 0V (OR 0 to 12V)

- Clutch - Fig1: Tap from Upper clutch switch Pin A, Grey wire to Blip Module YELLOW Fig1
- Brake - Fig2: Pin 12 (DK GRN) on BCM connector 3 – easily reached and tap-able via passenger side footwell, under floor mat panel.
- 12V can be any switched power, an inline switch is also recommended to 'turn off' blip when in the pits or during normal driving.
- Ground - Fig3: Made via Inline Accelerator Pedal Harness

### Brake - Fig 1: BCM Location (Passenger side footwell)

Brake: Remove the cover from C3/X3 and tap the Dark Green Wire to the BROWN wire of the blip module

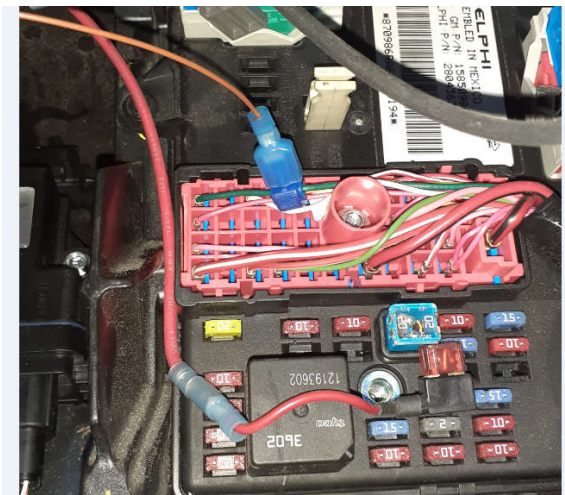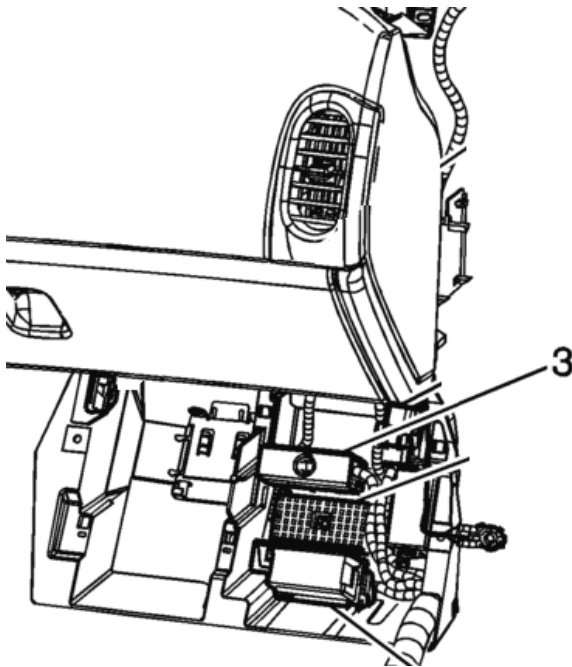

### BCM 12V Brake Locations:


C3/X3

A12 (Right Brake Lights) DK GRN

A9 (Left Brake Lights) YEL

**Clutch - Fig 2: Upper clutch switch CPP Switch Signal (Driver side footwell)**

Tap Pin A - Grey wire to the YELLOW wire of the blip module.

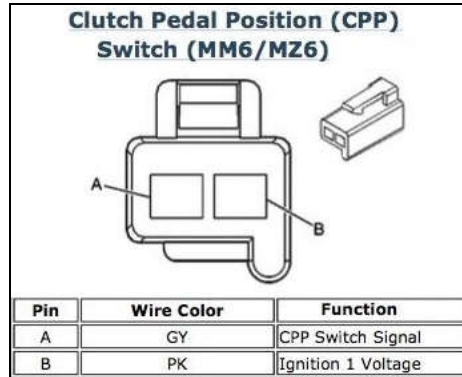

**Be sure ignition power is OFF or a DTC will be set for APP Sensors not present.**

**Throttle Pedal - Fig 3: Inline throttle pedal connection (Driver side footwell)**

1. Unplug the female 6 pin connector from the accelerator pedal sensor.
2. Plug the female 6 pin connector from the harness to the pedal sensor
3. Plug the male 6 pin connector from the harness to the OEM female 6 pin connector
4. Connect the 6 pin connecto to the blip module.

The pedal and throttle blip are now ready for testing.

**NOTE:** The box always acts as a pass thru for the APP signals, even if the Blip module is NOT powered.

